



Spotlight Elite Zoomable




| Power | Volt | IP |
|-------|--------|----|
| 8 W | 24 VDC | 66 |
| 15 W | 24 VDC | 66 |
| 25 W | 24 VDC | 66 |

Electrical
- 24 VDC


Requirements

- IP66/IP68 Connector / Junction Box
- Power Supply 24 V Constant Voltage


Dimension - 8 W

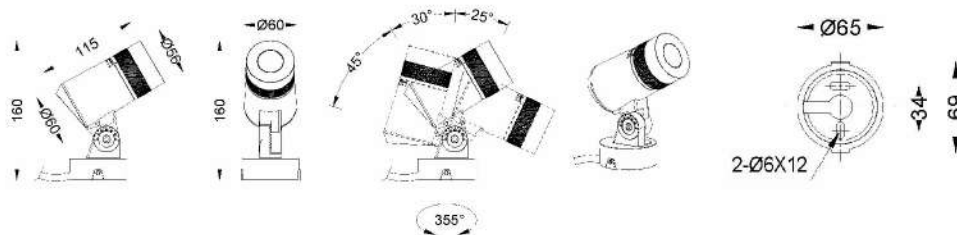

Dimension - 15 W

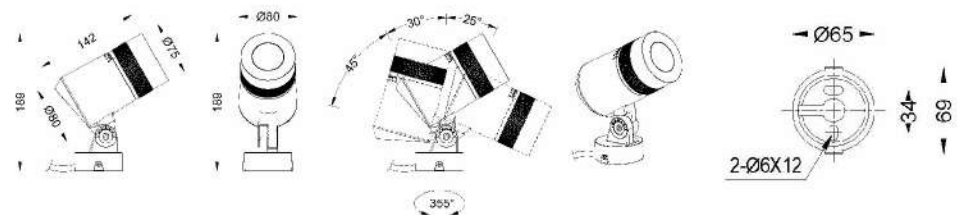


Dimension - 25 W

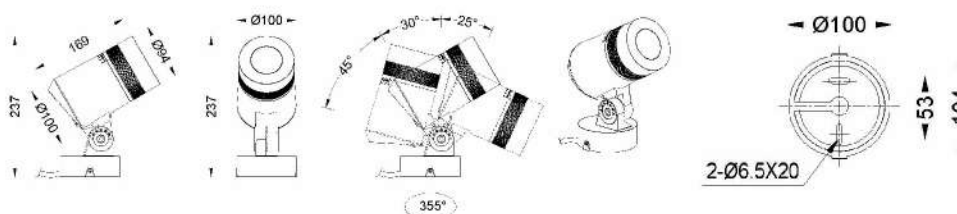


PERINGATAN

1. Ikuti petunjuk instalasi, garansi tidak berlaku jika instalasi tidak sesuai dengan petunjuk
2. Lampu 24 VDC, diperlukan power supply 24 V untuk pemasangan
3. Pastikan sumber listrik mati sebelum pemasangan instalasi lampu
4. Setiap koneksi kabel harus kering dan menggunakan IP66/IP68 konektor, garansi tidak berlaku jika instalasi tidak sesuai dengan petunjuk
5. Dilarang membuka komponen isi lampu, garansi tidak berlaku jika lampu telah dibuka


24 VDC – On/Off Installation

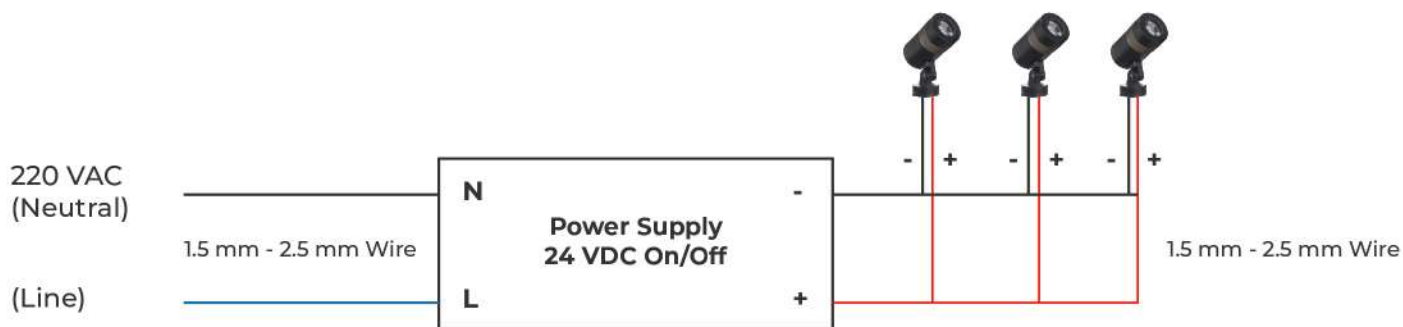

24 VDC – Triac Installation

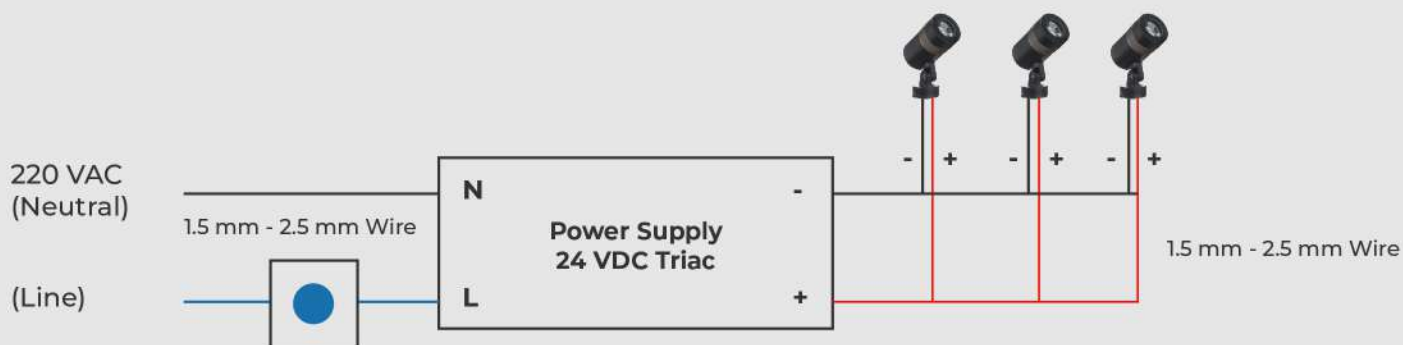

24 VDC – 0-10 V Installation

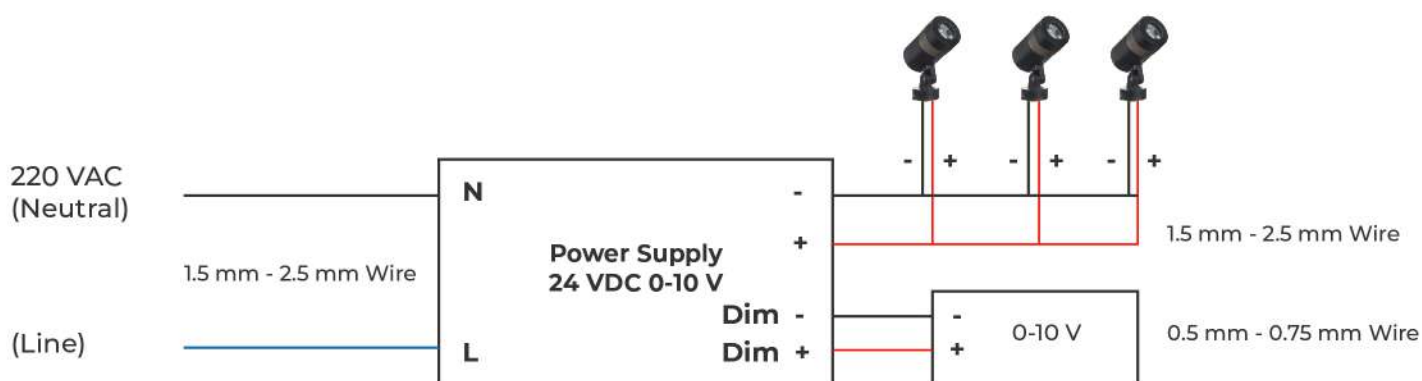

Voltage Drop Estimation

5 Meters 10 Meters 15 Meters 20 Meters



| Conductor | Cable Thickness (Diameter) | 5 Meters 24 VDC Voltage Drop @ 3 Ampere | 10 Meters 24 VDC Voltage Drop @ 3 Ampere | 15 Meters 24 VDC Voltage Drop @ 3 Ampere | 20 Meters 24 VDC Voltage Drop @ 3 Ampere |
|-----------|----------------------------|--|---|---|---|
| Copper | 2 x 1.45 mm (15 AWG) | 1.3 % | 2.6 % | 3.9 % | 5.2 % |
| Copper | 2 x 2.58 mm (10 AWG) | 0.4 % | 0.8 % | 1.2 % | 1.6 % |
| Copper | 2 x 3.66 mm (7 AWG) | 0.2 % | 0.4 % | 0.6 % | 0.8 % |

(Disclaimer : Cable type, length, thickness, open air/buried installation, power supply type, load, volt, number of luminaire may affect the result)

Power Supply Capacity & Maximum Amount of Luminaire

| Maximum Power Supply Capacity Used < 75% = < 75 W | Luminaire Power | Maximum Luminaire | Total Power Output |
|---|-----------------|-------------------|--------------------|
| 100 W Power Supply | 8 W | 8 pcs | 64 W |
| 100 W Power Supply | 15 W | 5 pcs | 75 W |
| 100 W Power Supply | 25 W | 3 pcs | 75 W |

(Disclaimer : Power supply type : power factor, efficiency may affect the result)

CONTACT US

Jl. Gading Raya Golf Boulevard, Ruko Crystal 1 No. 20, Gading Serpong, Tangerang, Banten, 15810, Indonesia

+62 817 411 0199

@ elcalighting

www.elcacorp.com

✉ elcalighting@gmail.com | elcacorp@yahoo.com

